
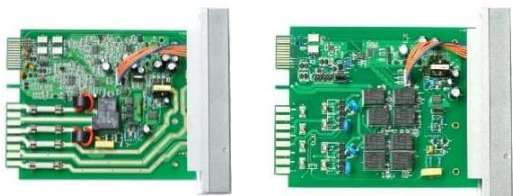


COMMANDER SERIES

Temp. & SVG Controller

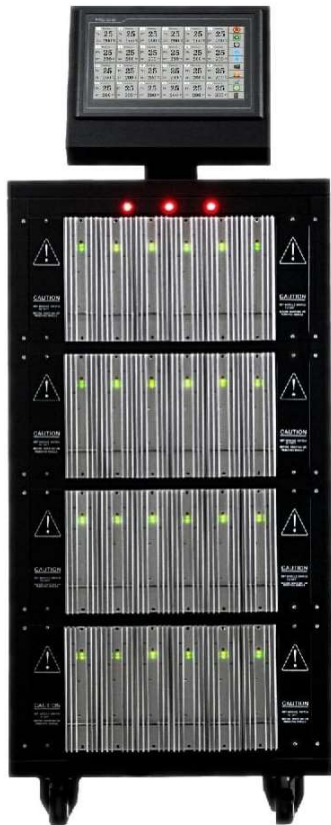

Temp. Control Module

SVG Control Module

General

- ◆ 2~120 zones
- ◆ 24 zones can be configured as SVG controller
- ◆ 10.2" Full color LCD touch screen, simple operation
- ◆ 2-style / Chinese, English or Spanish interface selectable
- ◆ "All in one" control module designed for reliability
- ◆ Two zones per temperature module at 15amps per zone
- ◆ Two valve gates control per SVG module
- ◆ Mold and controller protective design reduce down time
- ◆ Multi startup sequence available for process optimization
- ◆ Low voltage soft start to maximize heater life
- ◆ 24 mold patterns store, USB import /export
- ◆ CE compliant



Features

- ◆ Integrated temperature & sequence valve gate control
- ◆ Zones can be grouped to realize heating synchronously
- ◆ Sensor default solutions can be preset to reduce downtime
- ◆ Mold patterns management, change & setup mold easily
- ◆ Classification user password enabled security
- ◆ Operation log & alarm records to trace
- ◆ Real-time & historical curve display, easy to analyze
- ◆ Temperature data record can be exported to USB
- ◆ SVG control can be combination of time & screw position
- ◆ SVG setting can be previewed by sequential chart

**Contact us for complete
Hydraulic, Pneumatic or
Combination Systems**

www.StecOnline.com

1-844-310-STEC

info@steconline.com




COMMANDER SERIES



Specifications

Model	STVC-XS	STVC-S	STVC-M	STVC-L
Zones	2~16	2~32	2~64	2~120
Display Size	7.0"	10.2"		
User Interface	Full color touch screen , 2-style interface selectable			
Language	Chinese , English , or Spanish version selectable			
Power Supply	3-Ph+E(4-wire) AC220V / 3-Ph+N+E(5-wire) AC380V , 50/60Hz			
Sensor	Thermocouple J-Type/K-Type/E-Type			
Temperature Range	0°C~450°C(32°F~842°F)			
Control Mode	Fuzzy PID / Manual			
Control Accuracy	±0.5°C			
Power Control	Phase Angle / Zero Cross			
Rated Load	100~3600W(AC240V)/zone			
Connector Type	Customized			
Wiring Mode	Customized			
Circumstance	0°C~55°C(32°F~131°F)/10%RH~85%RH			

Models & Interface

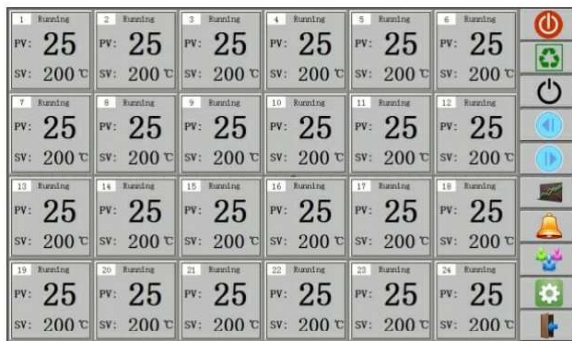

Contact us for complete Hydraulic, Pneumatic or Combination Systems

- **2-style interface selectable
- **Background color selectable for each zone
- **Chinese, English, Spanish version selectable

STVC-XS



STVC-S



STVC-M



STVC-L

